


DIGIMIC® Microphone Stand, flush-mounting

BRÄHLER ICS is committed to continually improving its products and so reserves the right to make technical modifications without notice

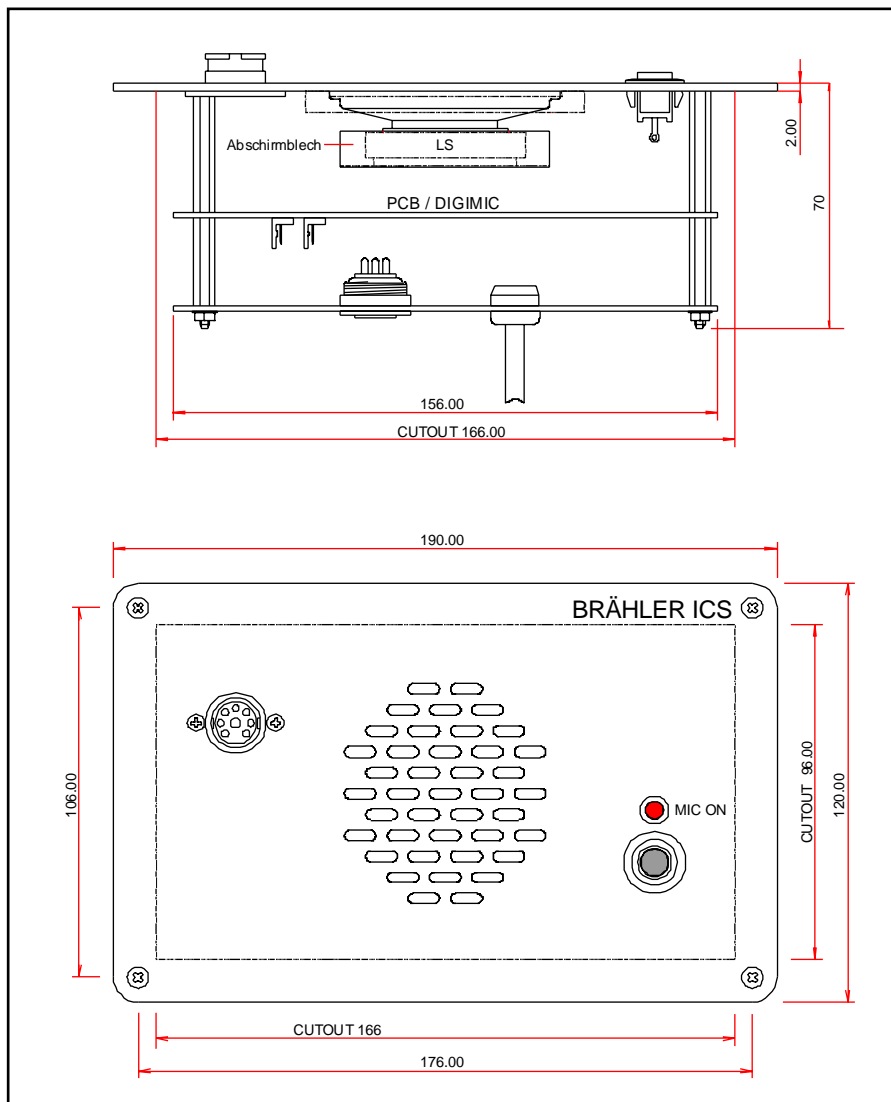

Technical Data

Corresponds to intern. standard IEC 914

Features

Equipped with microphone pre-amplifier and loudspeaker, volume control via control console

One pushbutton for Floor Request/ Cancel Floor Request and Microphone On/Off or Microphone On; LED for Floor Request Acknowledgement and Microphone Live

Coding switch for programming microphone numbers from 002 to 500

Connection

Connecting cable: permanently attached, length 2.5m, equipped with pin-connector, standard S8G

Connector socket for further microphone stands, standard S8G; connector socket for gooseneck microphone: lock-type, standard R7

Max. current consumption with microphone TM55/5: 85mA

Dimensions of front panel: 120x190mm; dimensions of table cutout: 190/170 x 166/96 x 2.5mm (dimensions can be adapt);

weight including cable: 700g;

colour: matt finish, black

Description

The EDC/5 is a delegate unit within the discussion system DIGIMIC®. There is no difference to a presidents unit except the coding to unit number 2.

The Microphone Stand is to be flush-mounted in conference desks, with built-in loudspeaker, connector socket for conference microphones TM56/ TM55, pushbutton for Floor Request/ Cancel Floor Request and Microphone On/Off or Microphone On. It is equipped with a LED for Floor Request Acknowledgement and Microphone

activated. A permanently attached cable with connector and a connector socket for further microphone stands is provided for the wiring.